
# Suspended Scales

MECHANICAL







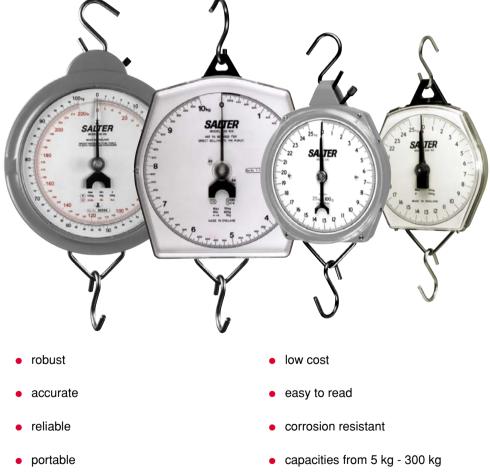

### Value in Weighing....



### 5 kg oblong stainless steel pan (Can be supplied with 235 6S & 235 10S only)

Dual marked 235 6S 5 kg x 20 g/11 lb x 1 oz

235 10S 5 kg x 10 g/11 lb x 1/2 oz



Can be supplied with 235 10X

Metric 235 10X 5 kg x 10 g 10 kg x 20 g

Dual marked 5 kg x 10 g/11 lb x 1/2 oz 10 kg x 20 g/22 lb x 1 oz



#### 10 kg & 25 kg round stainless steel pan 305 mm diameter

Can be supplied for retrofitting to the following suspended scales:

235 6S	<b>Metric</b> 10 kg x 50 g	<b>Dual marked</b> 10 kg x 50 g/22 lb x 2 oz
235 6M	25 kg x 100 g	25 kg x 100 g/55 lb x 4 oz
235 10S	10 kg x 20 g	
235 10X (Non-trade)	10 kg x 20 g 25 kg x 50 g	10 kg x 20 g/22 lb x 1 oz



© Sater Brocknell Weighing 2002. All rights reserved. This publication is issued to provide outline information only which, unless agreed by Avery Berkel Limited in writing, may no be regarded as a representation relating to the products or services concerned. Sater Becknell Weighing reserves the right to alter without notice the specification, design, price or conditions of support of any product or services concerned. Sater Becknell Weighing reserves the right to alter without notice the specification, design, price or conditions of support of any product or service.

Mechanical Suspended Scales/11.02



	(	3 3 3	
TER			
knell			
lidlands, B66 2TE 70 010 2241 nell.co.uk			

# **Suspended Scales**

91 mm (50 kg-100 kg

66 mm

232 m

91 mm (50 kg-100 k

66 mm (up to 25 kg

100 kg x 500 g / 220 lb x 1 lb

172 mm

### Model 235 6S


Compact, robust and corrosion resistant, 150 mm diameter dial housed in a though ABS plastic case with shatterproof polycarbonate dial cover. Low friction acetal bearings provide positive movement to give maximum sensitivity. Accurate to one part in 250 with up to 15% zero adjustment. Supplied with top and bottom hook.

### Option

Oblong pan (5 kg only).

100 kg x 500 g

# Metric Dual marked 5 kg x 20 g 5 kg x 20 g / 11 lb x 1 oz 10 kg x 50 g 10 kg x 50 g / 22 lb x 2 oz 25 kg x 100 g 25 kg x 100 g / 55 lb x 4 oz 50 kg x 200 g 50 kg x 200 g / 110 lb x 8 oz



### Model 235 10S

Robust and corrosion resistant, large easy to read 254 mm diameter dial housed in a tough ABS plastic case with a shatterproof polycarbonate dial cover. Low friction bearings provide positive movement to give maximum sensitivity. Accurate to one part in 500 with up to 15% zero adjust. Supplied with top and bottom hooks.

### Option

Oblong pan (5 kg only).

### Metric

5 kg	х	10 g
10 kg	х	20 g
25 kg	х	50 g
50 kg	х	100 g
100 kg	х	200 g

### Model 235 6M

Metric

5 kg x 20 g


10 kg x 50 g

25 kg x 100 g

50 kg x 200 g

100 kg x 500 g

Compact and robust, 150 mm diameter dial housed in the traditional metal case. Accurate to one part in 250 with up to 15% zero adjustment. Supplied with top and bottom hooks

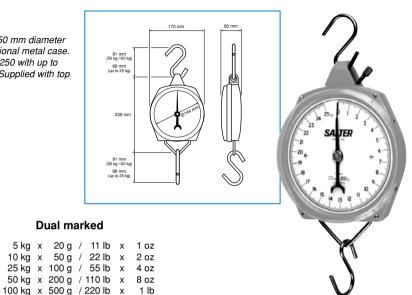

~	0320 mm	88 mm
19 2 4 4 1 M	Com m	383 mm
50 5AUTER 50 5AUTER 50 5AUTER 50 5AUTER 50 50 50 50 50 50 50 50 50 50 50 50 50 5	ľ	99 mm (ver 200 kg including tare
70 - 140 - 100 - 100 - 1		Metric
Y		5 kg x 1 10 kg x 2 25 kg x 5 50 kg x 10 100 kg x 20 200 kg x 50 300 kg x 1

### Model 235 10X (Trade & Non-Trade)

Heavy duty suspended scale, Eu trade approved up to 100 kg. 254 mm diameter easy to read dial housed in a robust grey die cast casing with low friction bearings providing postive movement to give maximum sensitivity. Accurate up to one part in 1000 trade, One part in 500, non-trade. Supplied with top and bottom hooks as standard. Double dial versions available, metric only, or up to 50 kg, dual marked.

### Option

Swivel bottom hook. Double lipped scoop (5 kg/10 kg only)

### Dual marked

х	10 g	5 kg	х	10 g	/	11 lb	х	1/2 <b>OZ</b>
х	20 g	10 kg	х	20 g	/	22 lb	х	1 oz
х	50 g	25 kg	х	50 g	/	56 lb	х	2 oz
х	100 g	50 kg	х	100 g	/	110 lb	х	4 oz
х	200 g	100 kg	х	200 g	/:	220 lb	х	8 oz
х	500 g	200 kg	х	500 g	/ •	440 lb	х	1 lb
х	1 kg	300 kg	х	1 kg	/ (	660 lb	х	2 lb

## MECHANICAL